


2

1


POWER REQUIREMENTS	VOLTS		AC 120 v @ 60Hz
	BATTERY BACKUP		4+ aa BATTERY 6v
LAMPS	LED 5v RGB		WS2811 DIODES
	IR REMOTE CONTROLLER		
	CUSTOMIZABLE WIFI APP		
PROFLAME II SYSTEM	5 LEVELS OF FLAME INTENSITY		
	REMOTE CONTROLLED IGNITION		
	VENTED CONFIGURATION		
HEATING OUTPUT	MAXIMUM HEAT	120,000 BTU/hr	35.13 kW
	MINIMUM HEAT (EN)	80,000 BTU/hr	23.42 kW
	MINIMUM HEAT (EP)	60,000 BTU/hr	17.56 kW

NOTE:  
EN- NATURAL GAS  
EP- PROPANE

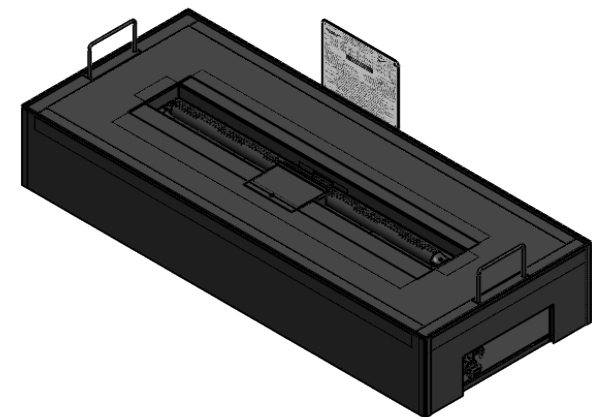

B




B

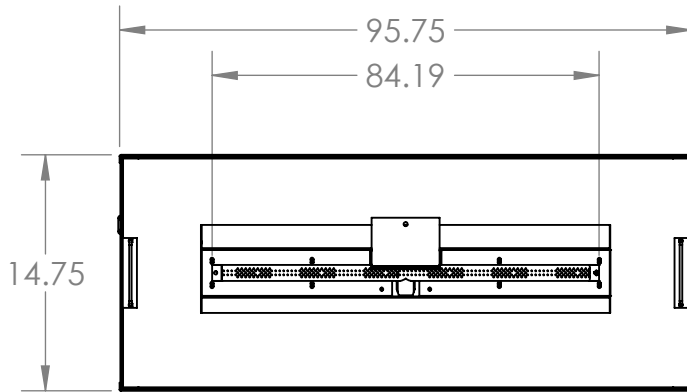

MINIMUM FIREBOX DIM. (INCHES)		
WIDTH	DEPTH	HEIGHT
96.00	15.00	20.00

A

A

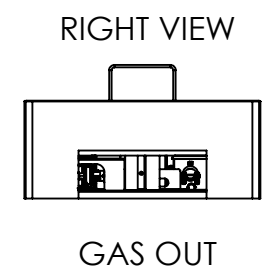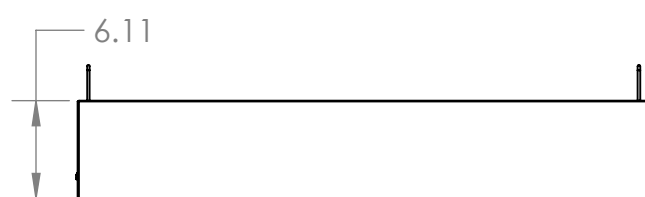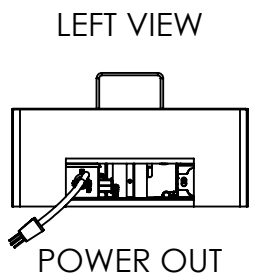

TITLE:  
LINEAR DROP IN BURNER, VENTED  
LDB96L-EP  
LDB96L-EN

SIZE	DWG. NO.	REV
<b>A</b>	LDB-96L-XX	A
SCALE: N/A WEIGHT:		SHEET 1 OF 1

2

1