


2

1

POWER REQUIREMENTS	AC 120 v @ 60Hz		
	BATTERY BACKUP		4X AA+ BATTERY
LAMPS	LED 5v RGB		WS2811 DIODES
	IR REMOTE CONTROLLER		
	CUSTOMIZABLE WIFI APP		
PROFLAME II SYSTEM	5 LEVELS OF FLAME INTENSITY		
	REMOTE CONTROLLED IGNITION		
	VENTED CONFIGURATION ONLY		
GLOWFIRE LOG SPECIES	LDBT-DW84	WESTERN DRIFTWOOD	
HEATING OUTPUT	MAXIMUM HEAT (EN)	105,000 BTU/hr	27.84 kW
	MINIMUM HEAT (EN)	70,000 BTU/hr	20.51 kW
	MAXIMUM HEAT (EP)	105,000 BTU/hr	27.84 kW
	MINIMUM HEAT (EP)	55,000 BTU/hr	16.12 kW

83.75

14.75

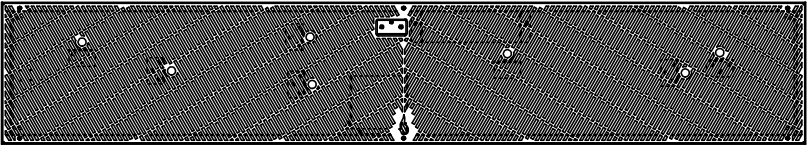

LEFT VIEW



POWER OUT

RIGHT VIEW



GAS OUT

6.11

NOTE:
EN- NATURAL GAS
EP- PROPANE
MUST ADD GLOWFIRE LOGS



MINIMUM FIRE BOX DIM. (INCHES)		
WIDTH	DEPTH	HEIGHT
84	15	20



TITLE:
BEDROCK TRADITIONAL
LINEAR DROP IN BURNER
LDBT84-EN, LDBT84-EP

SIZE	DWG. NO.	REV
A	LDBT84-XX	C
SCALE: N/A WEIGHT:		SHEET 1 OF 1