


2

1


POWER REQUIREMENTS	VOLTS		AC 120 v @ 60Hz
	BATTERY BACKUP		4+ aa BATTERY 6v
LAMPS	LED 5v RGB		WS2811 DIODES
	IR REMOTE CONTROLLER		
	CUSTOMIZABLE WIFI APP		
PROFLAME II SYSTEM	5 LEVELS OF FLAME INTENSITY		
	REMOTE CONTROLLED IGNITION		
	VENTFREE OR VENTLESS CONFIGURATION		
	OXYGEN DEPLETION SENSOR		
HEATING OUTPUT	MAXIMUM HEAT	39,500 BTU/hr	11.58 kW
	MINIMUM HEAT (EN)	27,000 BTU/hr	7.92 kW
	MINIMUM HEAT (EP)	18,000 BTU/hr	5.27 kW

NOTE:  
EN- NATURAL GAS  
EP- PROPANE

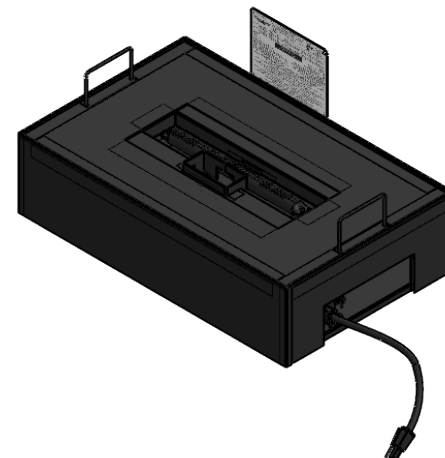

B




B

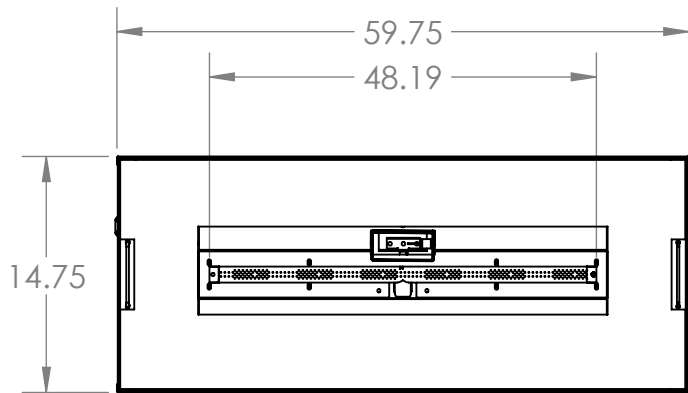

MINIMUM FIRE BOX DIM. (INCHES)		
WIDTH	DEPTH	HEIGHT
60	15	20

A

A

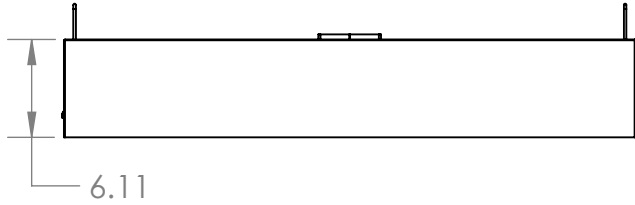

**GRAND CANYON GAS LOGS**

TITLE:  
VENTFREE, LINEAR DROP IN BRNR  
VFLDB60L-EP  
VFLDB60L-EN

SIZE	DWG. NO.	REV
<b>A</b>	VFLDB-60L-XX	<b>A</b>

SCALE: N/A WEIGHT: SHEET 1 OF 1

2

1